



THE GREEN YARDSTICK



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804 and ISO 14025

Quick-Lock® 15



 $\label{programme:PD} {\it Programme: The International EPD} {\it \ System, www.environdec.com}$

Programme operator: EPD International AB

Version: 1.0

Registration number: S-P-05283

Date of publication (issue): 01/02/2022 Date of revision: 09/12/2021 Date of validity: 09/12/2026

In accordance with ISO 14025, ISO 21930 and EN 15804





Summary Environmental product declaration

Content summary						
Verified by (external third-party verifier)	Martin Erlandsson, IVL Swedish Environmental Research Institute					
Programme used	The International EPD System. For more information see www.environdec.com					
Registration No	S-P-05283					
Owners declaration by	Saint-Gobain API BV P.O Box 1 3840 AA Harderwijk The Netherlands					
Declaration as construction products	The products to be verified herein are metallic grid profiles for ceiling suspension systems. The present environmental product declaration complies with standard ISO 14025 and describes the environmental impact. Its purpose is to promote compatible and sustainable environmental development of related construction methods.					
	Reference PCR document: EN 15804 as the core PCR + International EPD System Product Category Rules - PCR for constructions products and construction services, Acoustical systems solutions (sub-oriented PCR; appendix to PCR 2012:01) - previously Acoustic ceilings. EPD of construction products may not be comparable if they do not comply with EN 15804.					
Validity	09/12/2026					
Content of the declaration	This is an environmental product declaration containing environmental information of the product in the family Quick-Lock® 15. The values presented in this EPD are represented for the following products: T15/38 HE MB 3000, T15/38 HE CT 300, T15/38 HE CT 600, T15/38 HE CT 1200					
	Supplemental product information can be found at www.api.nl					
Issued date	09/12/2021					

Product responsible:

Thomas Roul

Product Engineering & Development Manager

Saint-Gobain Ceilings

Independent third party verifier:

Martin Erlandsson

V Hair WANGEN

LCA Business Development Manager

IVL

Product description

Product description and description of use:

This Environmental Product Declaration (EPD) describes the environmental impact of 1 linear meter (1 lm) of installed steel profile with the intended use to suspend acoustic ceiling tiles.

The production site of Saint-Gobain API (The Netherlands) manufactures ceiling grid systems in different sizes. Cold rolled steel is shaped into a "body" through a process called roll forming. A cap of steel ("capping") is added on the body to make the grid visually appealing. Multiple holes are then punched in the body to allow installation. The finished grids are then packed in cardboard boxes.

The grids provide excellent mechanical characteristics to suspend acoustic ceiling tiles, which contribute to a better health by their sound absorption capabilities. There is no maintenance needed for the grids except for normal room surface cleaning and there is no ageing, hence the grid system can last for the building lifetime.

Description of the main product components and materials for 1 m of product:

Parameter	Value
Product height	38 mm
Product width	15 mm
Hot-dip galvanized steel	100wt%
Plastic wrapping	Og

Total weights									
	T15/38 HE MB	T15/38 HE CT	T15/38 HE CT	T15/38 HE CT					
Product	3000	300	600	1200					
Total weight [kg]	0.3	0.3	0.3	0.3					

All raw materials contributing more than 5% to any environmental impact are listed in the table above. The profiles are free from substances of very high concern (SVHC). The product contains no substances from the REACH Candidate list (of 13.07.2021).

If there in future occur production changes that generate an increased impact larger than 10% the EPD will be updated and re-verified.

Other environmental indicators

Regarding the indoor environment, the Quick-Lock® 15 products are certified for or fulfil regulations according to the following table:

Certificate and Regulations

French VOC A+


LCA calculation information

Declared unit	1 lm of installed steel profile
System boundaries	Cradle to grave: Mandatory stages = A1-3, A4-5, B1-7, C1-4 and optional stage = D This EPD covers the environmental impact only of the ceiling profiles.
Reference Service Life (RSL)	50 years
	The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%). Flows related to human activities such as employee transport are
	excluded.
Cut-off rules	Biogenic carbon has not been included in calculations.
	The construction of plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the production of the building product when compared at these systems lifetime level.
Allocations	Allocation criteria are based on mass.
	For A1-A3: Global
Geographical coverage and time period	For A4 : European covering (2019)

According to EN 15804, EPD of construction products might not be comparable if they do not comply with this standard. According to ISO 21930, EPD's might not be comparable if they are from different EPD administrating schemes.

Life Cycle stages

Flow diagram of the Life Cycle

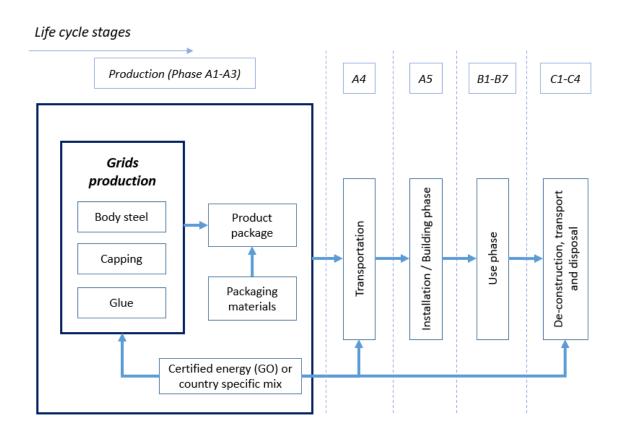

Product stage, A1-A3

Description of the stage:

The product stage of the profiles is divided into 3 modules: A1 "Raw material and supply", A2 "Transport to the manufacturer" and A3 "Manufacturer". The aggregation of the modules A1, A2 and A3 is a possibility considered by the EN 15 804 standard. This rule is applied in this EPD.

A1 Raw material supply

This module takes into account the extraction and processing of all raw materials and energy which occur upstream to the studied manufacturing process.

Specifically, the steel material supply covers production of the cold rolled steel and eventual coating. Packaging production and glue are also accounted in the calculation. All electricity is taken account for in country specific mix.

A2 Transport to the manufacturer

The raw materials are transported to the manufacturing site. In our case, the modelling includes: road, boat or train transportations (average values) of each raw material.

A3 Manufacturina

The profiles are manufactured on a continuous process. The steel coils are essentially unwrapped, shaped and cut to the desired length.

Manufacturing covers all processes linked to production, which comprises various related operations besides on-site activities such as, packaging and internal transportation. The manufacturing process also yields data on the combustion of refinery products, such as natural gas, diesel and gasoline, related to the production process.

The environmental profile of these energy carriers is modelled for local conditions. Packaging-related flows in the production process and all up-stream packaging are included in the manufacturing module, i.e. wooden pallets, cardboard and PE-film. Apart from production of packaging material, the supply and transport of packaging material are also considered in the LCA model. They are reported and allocated to the module where the packaging is applied. Data on packaging waste created during this step is then generated. It is assumed that packaging waste generated in the course of production and up-stream processes is 100% collected and either recycled or incinerated with energy recovery, related to material and quality, in ratios according to the local material handling companies.

Construction process stage, A4-A5

Description of the stage:

The construction process is divided into 2 modules: A4 "Transport to the building site" and A5 "Installation in the building.

Description of scenarios and additional technical information:

A4 Transport to the building site

This module includes transport from the production gate to the building site. Transport is calculated on the basis of a scenario with the parameters described in the following table.

Parameter	Value
Fuel type, consumption of fuel and vehicle or vehicle type used for transport	Average truck trailer with a 24t payload, diesel consumption 31.7 litres for 100 km
Distance	630 km (based on transports in 2019)
Capacity utilisation (including empty returns)	90% of the capacity in volume 100% of empty returns
Bulk density of transported products (if available)	0.1-0.8 kg/m
Volume capacity utilisation factor (if available)	0.45

The transport distance has been calculated from a European average transport for API in 2019 from the parameters in the table above.

A5:1 Installation in the building

This module includes waste of products during the implementation, i.e. the additional production processes to compensate the loss and the waste processing which occur in this stage.

Scenarios used for quantity of product wastage and waste processing are:

Parameter	Value
Waste of materials on the building site before waste processing, generated by the product's installation	5%
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling,	Packaging waste is 100 % collected and modelled as material for recycling
for energy recovering, disposal	Grid waste is recycled.

A5:2 Energy usage

As a general figure the time to install 1 m² ceiling is considered to be 20 minutes. During this time the installer is considered to use handheld appliances for about 5% of this time which in this case results in 1 minute. A handheld device such as a cordless screwdriver is considered to have a power of 0.7 kilowatt. Therefore, in one minute it will consume a total energy of 0.7*60 = 4.2 kilojoule = 0.0042 MJ, per m² ceiling. In this context it is a negligible contribution and will not be part of the LCA calculation (lower than 0.1% of the total energy consumption).

Use stage (excluding potential savings), B1-B7

Description of the stage:

The use stage is divided into 7 modules, B1 "Use", B2 "Maintenance", B3 "Repair", B4 "Replacement", B5 "Refurbishment", B6 "Operational energy use", B7 "Operational water use"

Description of scenarios and additional technical information:

Once installation is complete, no actions or technical operations are required during the use stages until the end of life stage. Therefore, acoustic ceiling panels have no impact (excluding potential energy savings) on this stage.

End-of-life stage C1-C4

Description of the stage:

The end-of life stage is divided into 4 modules; C1 "De-construction, demolition", C2 "Transport to waste processing", C3 "Waste processing for reuse, recovery and/or recycling", C4 "Disposal".

Description of scenarios and additional technical information:

C1, De-construction, demolition

The dismantling of grid system takes part during renovation or demolition of the building. In this case, the environmental impact is assumed to be very small and can be neglected.

C2, Transport to waste processing

The model for transportation (see A4, Transportation to the building site) is applied.

C3, Waste processing for reuse, recovery and/or recycling;

The product is considered to be recycling.

C4, Disposal;

The product is assumed to be 100% recycled.

Parameter	Value/description
Collection process specified by type	O,1 - O,8 kg of steel grid (collected as sorted metal)
Recovery system specified by type	Grid collected as sorted metal
Disposal specified by type	0,2 - 0,35 kg of grid to recycling
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 24t payload, diesel consumption 31.7 litres for 100 km 50 km (distance to landfill)

Reuse/recovery/recycling potential, D

Not declared.

LCA results

LCA model, aggregation of data and environmental impact are calculated through the GaBi Professional software. Secondary data is mainly taken from Ecoinvent 3.6 with some GaBi datasets.

Raw materials and energy consumption, as well as transport distances have been taken directly from the manufacturing plants of Saint-Gobain API in 2019.

Modules declared, geographical scope, share of specific data, and variation between sites (last two percentages given in GWP indicator) are stated in the following table.

	Product phase Construction process phase Use phase			End of life phase				Resource recovery phase									
	Raw material and supply	Transport to the manufacturer	Manufacturing	Transport to the building site	Installation in the building	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport to waste processing	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	А3	A4	A5	В1	В2	В3	В4	В5	В6	B <i>7</i>	C1	C2	C3	C4	D
Modules declared	Χ	Χ	Χ	Х	Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	Х	MND
Geography	NL, EU, GLO	NL, EU, GLO	NL	EU, GLO	EU, GLO								EU, GLO	EU, GLO	EU, GLO	EU, GLO	-
Specific data	<10%				-												
Variation sites	One site								-							-	

Summary of the LCA results are detailed in the tables below.

All results in the EPD are written in logarithmic base of ten. Reading example: $5.2E \cdot 03 = 5.2 \cdot 10^3 = 0,0052$.

MND (module not declared), is equal to MNA (module not assessed).

P			Environmental imp		71.500 17	77.5.00 HT
Parar	neters	A1-A3	1.04E+00	1.03E+00	1.02E+00	1.02E+00
		A1-A3	1.83E-02	1.86E-02	1.81E-02	1.81E-02
		A5	5.18E-02	5.15E-02	5.11E-02	5.11E-02
		B1 - B7	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00	0.00E+00
(B)		C2	1.36E-03	1.36E-03	0.00E+00 1.36E-03	0.00E+00 1.36E-03
0		C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Global Warming Potential	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	(GWP) - kg CO ₂ equiv/FU	D	MND	MND	MND	MND
		Total AC	1.11E+00	1.10E+00	1.09E+00	1.09E+00
			global warming re	ming potential of a sulfting from the em erence gas, carbon	ssion of one unit of	that gas relative to
		A1-A3	1.28E-09	1.75E-09	9.35E-10	9.08E-10
		A4 A5	4.17E-18	4.24E-18	4.12E-18	4.11E-18
		A3 B1-B7	6.38E-11 0.00E+00	8.76E-11 0.00E+00	4.67E-11 0.00E+00	4.54E-11 0.00E+00
68		Cl	0.00E+00	0.00E+00	0.00E+00	0.00E+00
W		C2	3.09E-19	3.09E-19	3.09E-19	3.09E-19
	Ozone Depletion (ODP) kg	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	CFC 11 equiv/FU	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D Total AC	MND 1.34E-09	MND 1.84E-09	MND 9.82E-10	MND 9.53E-10
			Destruction of the	stratospheric ozone lay	er which shields the ec	arth from ultraviolet
			radiation harmful to l chlorine and/or bromi break down when	life. This destruction of a ine containing compout they reach the stratosp mole	ozone is caused by the ads (chlorofluorocarbo here and then catalytic cules.	breakdown of certain ins or halogens), which cally destroy ozone
		A1-A3 A4	2.29E-03 2.48E-05	2.30E-03 2.52E-05	2.25E-03 2.45E-05	2.25E-03 2.45E-05
		A4 A5	1.15E-04	2.52E-05 1.15E-04	1.13E-04	1.12E-04
		B1 - B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
æ5		C2	1.84E-06	1.84E-06	1.84E-06	1.84E-06
•	Acidification potential (AP)	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	kg SO ₂ equiv/FU	C4 D	0.00E+00 MND	0.00E+00 MND	0.00E+00 MND	0.00E+00 MND
		Total AC	2.43E-03	2.44E-03	2.39E-03	2.39E-03
		A1-A3	made environment substances are	have negative impacting, buildings. The ragriculture and foss production, heati	nain sources for em I fuel combustion us ng and transport. 3,40E-04	issions of acidifying ted for electricity 3.40E-04
		A4	5.24E-06	5.33E-06	5.17E-06	5.17E-06
		A5 B1 - B7	1.76E-05	1.78E-05	1.70E-05	1.70E-05
		C1	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00
		C2	3.89E-07	3.89E-07	3.89E-07	3.89E-07
	Eutrophication potential	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	(EP) kg (PO ₄) ³ - equiv/FU	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D	MND	MND	MND	MND
		Total AC		3.79E-04 nent of waters and one associated adver		
		A1-A3	3.88E-04	3.86E-04	3.82E-04	3.82E-04
		A4	-7.41E-06	-7.53E-06	-7.32E-06	-7.31E-06
		A5 B1 - B7	1.94E-05 0.00E+00	1.93E-05 0.00E+00	1.91E-05 0.00E+00	1.91E-05 0.00E+00
		C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Photochemical ozone	C2	-5.50E-07	-5.50E-07	-5.50E-07	-5.50E-07
	creation (POPC) kg Ethene	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	equiv/FU	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D Total AC	MND 3.99E-04	MND 3.98E-04	MND 3.94E-04	MND 3.94E-04
			of nitrogen oxides	s brought about by with hydrocarbons in an example of a p	the presence of su	nlight to form ozone
		A1-A3	4.94E-06	4.90E-06	4.88E-06	4.88E-06
		A4 A5	6.74E-10 2.47E-07	6.85E-10 2.45E-07	6.65E-10 2.44E-07	6.65E-10 2.44E-07
	Abiotic depletion potential	B1 - B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	for non-fossil resources	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	(ADP-elements) - kg Sb	C2	5.00E-11	5.00E-11	5.00E-11	5.00E-11
	equiv/FU	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D Total AC	MND 5.19E-06	MND 5.15E-06	MND 5.13E-06	MND 5.13E-06
		A1-A3	1.02E+01	1.02E+01	1.01E+01	1.01E+01
		A4	2.52E-01	2.56E-01	2.49E-01	2.48E-01
_		A.5	5.10E-01	5.09E-01	5.03E-01	5.02E-01
		B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Abiatic do-lating	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Abiotic depletion potential for fossil resources (ADP-	C2	1.87E-02	1.87E-02	1.87E-02	1.87E-02
	fossil fuels) - MJ/FU	C3 C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D D	0.00E+00 MND	0.00E+00 MND	0.00E+00 MND	0.00E+00 MND
		Total AC	1.10E+01	1.10E+01	1.08E+01	1.08E+01
			Consumption of no	on-renewable resou for future ç		ing their availability

Paran	neters		Environmental im	T15/38 HE CT 300	T15/38 HE CT 600	TI 5/38 HE CT 120
Paran	neters	A1-A3	5.85E.01	5 91F.01	5.75F-01	5 75E.01
		A4	6.14E-03	6.24E-03	6.06E-03	6.05E-03
0*	Use of renewable	A5	2.93E-02	2.95E-02	2.88E-02	2.87E-02
w	primary energy excluding renewable	81-87 C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00 0.00E+00
	primary energy	C2	0.00E+00 4.55E-04	0.00E+00 4.55E-04	0.00E+00 4.55E-04	4.55E-04
	resources used as raw materials	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	- MJ / FU	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	,	D	MND	MND	MND	MND
		Total A/C	6.21E-01	6.27E-01	6.10E-01	6.10E-01
		A1-A3	3.01E-01	4.03E-01	2.28E-01	2.22E-01
_		A4 A5	0.00E+00 -3.01E-01	0.00E+00 -4.03E-01	0.00E+00 -2.28E-01	0.00E+00 -2.22E-01
F	Use of renewable	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
_	primary energy used as raw materials	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	- MJ / FU	C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	.,	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C4 D	0.00E+00	0.00E+00 MND	0.00E+00	0.00E+00
		Total AC	MND 0.00E+00	0.00E+00	MND 0.00E+00	MND 0.00E+00
		A1-A3	8.86E-01	9.94E-01	8.03E-01	7.97E-01
		A4	6.14E-03	6.24E-03	6.06E-03	6.05E-03
otal u	use of renewable primary	A5	-2.72E-01	-3.74E-01	-1.99E-01	-1.93E-01
	ergy resources (primary	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	rgy and primary energy	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
re	esources used as raw materials)	C2 C3	4.55E-04 0.00F+00	4.55E-04	4.55E-04	4.55E-04 0.00F+00
	- MJ / FU	C4	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00
		D D	0.00E+00	0.00E+00	0.00E+00	MND
		Total AC	6.21E-01	6.27E-01	6.10E-01	6.10E-01
			T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	TI 5/38 HE CT 120
		A1-A3	1.08E+01	1.08E+01	1.06E+01	1.06E+01
		A4	2.54E-01	2.59E-01	2.51E-01	2.51E-01
	Use of non-renewable primary energy	A5	5.40E-01	5.39E-01	5.32E-01	5.32E-01
J	primary energy excluding non-	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	renewable primary	C1 C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	energy resources used	C2 C3	1.89E-02 0.00E+00	1.89E-02 0.00E+00	1.89E-02 0.00E+00	1.89E-02 0.00E+00
	as raw materials - MJ /FU	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	/10	D	MND	MND	MND	MND
		Total AC	1.16E+01	1.16E+01	1.14E+01	1.14E+01
		A1-A3	2.31E-02	2.40E-02	2.24E-02	2.24E-02
		A4 A5	0.00E+00 -2.37E-03	0.00E+00 -3.28E-03	0.00E+00 -1.71E-03	0.00E+00 -1.66E-03
7	Use of non-renewable	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
_	primary energy used as	CI	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	raw materials - MJ / FU	C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	- 1413 / 10	€3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		€4	-2.07E-02	-2.07E-02	-2.07E-02	-2.07E-02
		D	MND	MND	MND	MND
		Total AC A1 - A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		A1-A3	1.08E+01 2.54E-01	1.08E+01 2.59E-01	1.06E+01 2.51E-01	1.06E+01 2.51E-01
		A5	5.38E-01	5.36E-01	5.30E-01	5.30E-01
	al use of non-renewable mary energy resources	81-87	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(prin	nary energy and primary	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	gy resources used as raw	€2	1.89E-02	1.89E-02	1.89E-02	1.89E-02
	materials) - MJ / FU	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C4 D	-2.07E-02	-2.07E-02	-2.07E-02	-2.07E-02
		Total AC	MND 1.16E+01	MND 1.16E+01	MND 1.14E+01	MND 1.14E+01
			T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	TI 5/38 HE CT 120
		A1-A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
2		A5	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Use of secondary material	81-87	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Material Kg / FU	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C2 C3	0.00E+00 0.00F+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00F+00
		C3	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00
		D	MND	MND	MND	MND
		Total AC	0.00E+00	0.00E+00	0.00E+00	0.00E+00
			T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 120
		A1-A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
_	Use of renewable	A5	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	secondary fuels MJ / FU	B1-B7 ⊂1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	m3 / FU	C1 C2	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00
		C3	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00	0.00E+00
		C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D	MND	MND	MND	MND
		Total AC	0.00E+00	0.00E+00	0.00E+00	0.00E+00
			T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 120
_		A1-A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
٤		A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
_	Use of non-renewable	A5 81-87	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	secondary fuels - MJ / FU	B1-B/	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00
		C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		D	MND	MND	MND	MND
		Total A-C	0.00E+00	0.00E+00	0.00E+00	0.00E+00
			T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 120
		A1-A3	6.78E-03	6.75E-03	6.70E-03	6.69E-03
		A4	1.55E-06	1.58E-06	1.54E-06	1.53E-06
0	Here the extension is	A5	3.39E-04	3.38E-04	3.35E-04	3.35E-04
9	Use of net fresh water m³ / FU	81-87	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	/ 10	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
		C2 C3	1.15E-07	1.15E-07	1.15E-07	1.15E-07
		C3	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00	0.00E+00 0.00E+00
				U.UUL 100	U.UUL 100	
		D	MND	MND	MND	MND

Environmental impacts											
Parameters		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200						
	A1-A3	7.75E-09	7.68E-09	7.68E-09	7.68E-09						
	A4	2.71E-12	2.76E-12	2.68E-12	2.67E-12						
	A5	3.88E-10	3.84E-10	3.84E-10	3.84E-10						
Hazardous waste	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
disposed	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
kg / FU	C2	2.01E-13	2.01E-13	2.01E-13	2.01E-13						
	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	D	MND	MND	MND	MND						
	Total A-C	8.15E-09	8.07E-09	8.07E-09	8.07E-09						
		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200						
	A1-A3	8.55E-02	8.22E-02	8.22E-02	8.22E-02						
	A4	6.84E-06	6.95E-06	6.75E-06	6.74E-06						
	A5	4.28E-03	4.11E-03	4.11E-03	4.11E-03						
Non-hazardous	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
waste	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
disposed - kg / FU	C2	5.07E-07	5.07E-07	5.07E-07	5.07E-07						
	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	D	MND	MND	MND	MND						
	Total A-C	8.98E-02	8.63E-02	8.63E-02	8.63E-02						
		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200						
	A1-A3	1.79E-06	1.79E-06	1.79E-06	1.79E-06						
	A4	2.98E-07	3.03E-07	2.94E-07	2.94E-07						
Radioactive waste	A5	8.96E-08	8.96E-08	8.95E-08	8.95E-08						
disposed	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
kg / FU	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
Kg / 10	C2	2.21E-08	2.21E-08	2.21E-08	2.21E-08						
	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
	D	MND	MND	MND	MND						

Output flow

Environmental impacts										
Parameters		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200					
	A1-A3	-	-	-	-					
	A4	-								
	A5	-	-	-	-					
(a)	B1-B7	-	-	-	-					
Components for re-use kg/FU	C1	-	-	-	-					
kg/F0	C2	-	-	-	-					
	C3	-	-	-	-					
	C4	-	-	-	-					
	D	MND	MND	MND	MND					
	Total A-C	-		-	-					
		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200					
	A1-A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	A5	3.55E-02	4.19E-02	3.10E-02	3.06E-02					
Materials for recycling	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
kg/FU	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
Kg/10	C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	C4	3.37E-01	3.37E-01	3.37E-01	3.37E-01					
	D	MND	MND	MND	MND					
	Total A-C	3.73E-01	3.79E-01	3.68E-01	3.68E-01					
		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200					
	A1-A3	-	-	-	-					
	A4	-	-	-	-					
	A5	-	-	-	-					
Materials for energy	B1-B7	-	-	-	-					
reovery - kg/FU	C1	-	-	-	-					
100101/ 119/10	C2	-	-	-	-					
	C3	-	-	-	-					
	C4	-			-					
	D	MND	MND	MND	MND					
	Total A-C	-	-	-	-					
		T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200					
	A1-A3	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	A5	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	B1-B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
Exported energy MJ/FU	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00					
	D	MND	MND	MND	MND					
	Total A-C	-		_	_					

Summary

Aggregation of results from A1 to C4 in selected impact categories.

	T15/38 HE MB 3000	T15/38 HE CT 300	T15/38 HE CT 600	T15/38 HE CT 1200
Global warming CO ₂ kg CO ₂ equiv/FU	1.11	1.10	1.09	1.09
Non-renewable resources consumption [1] MJ/FU	11	11	11	10.82
Energy consumption [2] MJ/FU	12	12	12	12.01
Water consumption [3] m³/FU	0.01	0.01	0.01	0.01
Waste production [4]	0.09	0.09	0.09	0.09

 $[\]label{prop:cond} \ensuremath{\text{[2]}} \textit{ This indicator corresponds to the total use of primary energy}.$

^[3] This indicator corresponds to the use of net fresh water.

 $[\]label{lem:constraints} \textbf{[4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.}$

Reference list

Reach: EU REACH Regulation (EC) No 1907/2006

LCA report: Project_report_on_API_LCA_2021-12-09

EN 15804:2012+A1:2013: Sustainability of construction works - Environmental product declarations

PCR 2012:01 Construction products and construction services (version 2.33 dated 2020-09-18)

CONTACT INFORMATION

LCA author and EPD owner



Saint-Gobain API BV P.O Box 1 3840 AA Harderwijk The Netherlands

Elie Falcand elie.falcand@saint-gobain.com

Programme operator



EPD International AB Box 210 60 100 31 Stockholm Sweden info@environdec.com